


Stackable DNV A60 18' Sleeper

CERTIFIED STACKABLE LINKABLE SLEEPER FOR SAFE AREAS

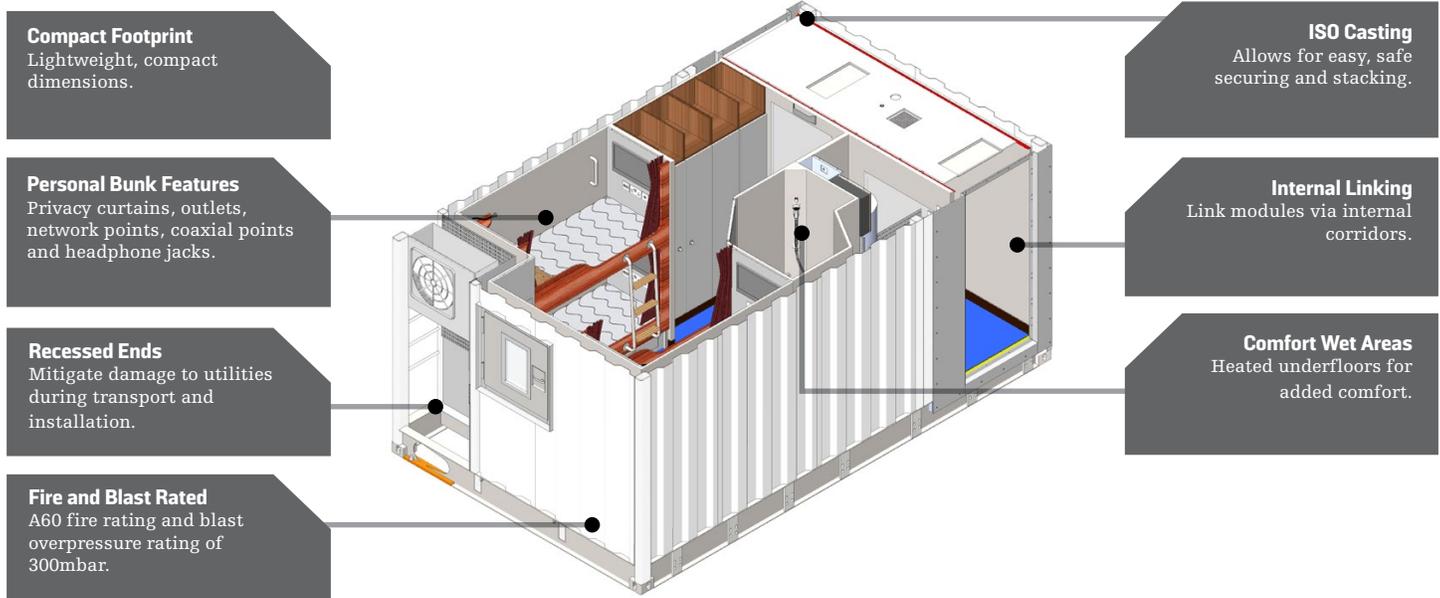

HB Rentals' 18' DNV A60 Linkable Sleeper is designed to accommodate up to 4 individuals. Certified to DNV 2.7-1, the 18' sleeper module can be utilized where heavier, larger modules cannot be. The module provides easy plug and play connections with safe and quick installation features. Superior engineering allow modules to link horizontally and stack up to four units high, depending on the vessel type.

Certifications:

- DNV 2.7-1
- BS EN 12079

Compliant:

- MSC/Circ.860
- IMO/SOLAS
- HSE – Notice 82

Designed for Marine Environments

- DNV 2.7-1 certified – built to withstand harsh, extreme conditions.
- Structural and lifting components DNV certified.

Maximize Limited Site Space

- Flexible configuration – 2 and 4 man sleeper layouts.
- Top and bottom ISO casting for stacking and securing.
- 18' dimensions allow use in projects with strict weight and footprint limitations.

Increased Worker Comfort

- Bunks are equipped with black-out privacy curtains, bunk lights and outlets.
- Each bunk contains network points, coaxial points and headphone jacks.
- Each bedroom comes with desk area and drawer unit.
- Individual lockers.
- Wet areas are equipped with underfloor heating.
- Easy corridor access utility service cupboard.

Increased Worker Comfort (cont.)

- 250l hot water storage heater meaning only a cold water supply connection is required.
- Internal linking corridors mitigate time exposed to outdoor elements.

Robust Climate Control

- HVAC system designed for external ambient between -20C° to +50° C.

Maximize Worker Safety

- A60 fire rated envelope.
- 300mbar blast rated construction.
- Automatic fire dampers.
- Standard Fire & Gas detectors with optional Fire & Gas panel.
- Multiple egress capable – emergency exit hatch in room.

Designed for Safe and Easy Deployment

- Twist lock installation.
- Daisy Chain connects consecutive buildings.
- Single side utility connection simplifies installation.
- Recessed ends housing all utility connections.
- Plumbing split out for black and grey water separation.
- Separate saltwater and potable water connections.




Exterior



Cabin



Wetroom

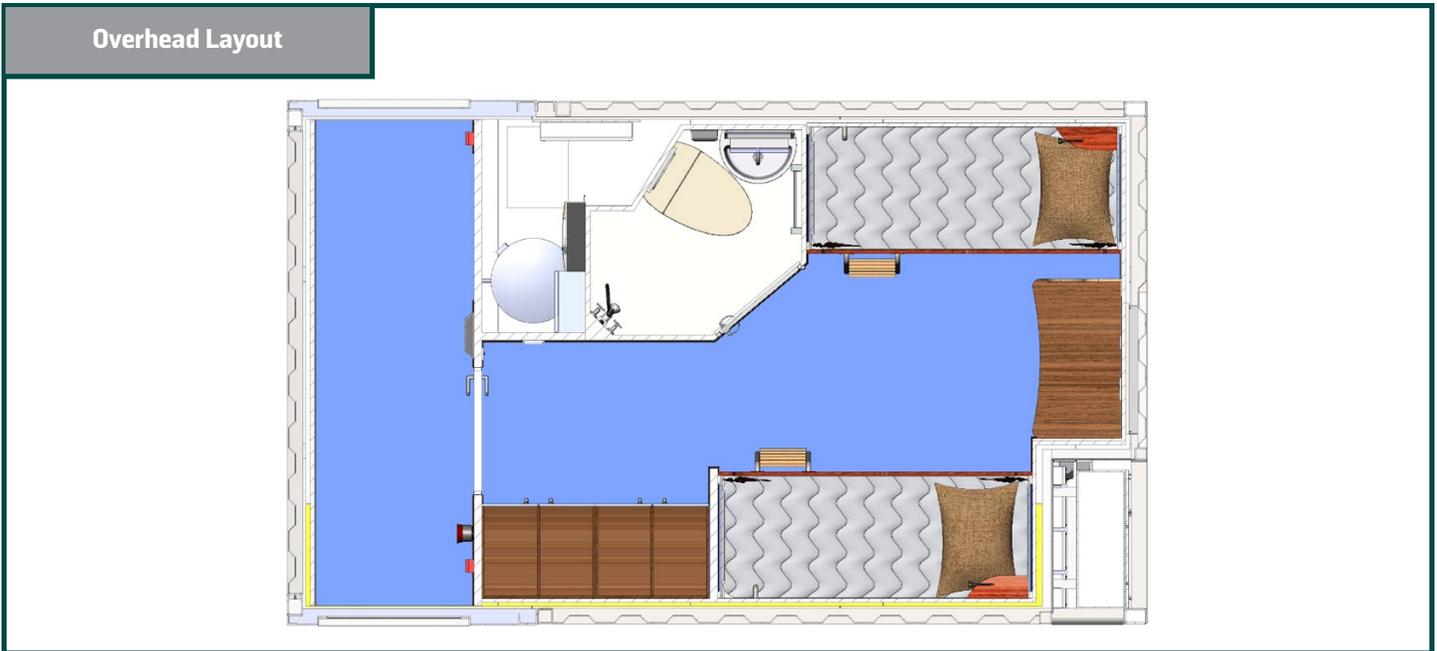

Overhead Layout

Specifications

Dimensions/Weights:

5600mm L x 3400mm W x 3050mm H
 (18' L x 11' W x 10' H)
 10,500kgs
 (23,148 lbs.)

Transportation:

- Fitted with ISO Casting

Structure:

- DNV 2.7-1
- BS EN 12079
- Includes Lifting Pad Eyes, Slings and Shackles

Bulkheads:

Fire Rating: A60

Fire & Gas:

F&G Detection
 F&G Panel (Optional)

Fire Damper:

Electro-Mechanical Actuation

Protection System:

Safe Area Classification

Power Requirements:

3ph + E
 380V-480V, 32amp

Climate Control:

1 AC System/Bedroom

Design Temperature:

-20° C to +50° C

more info at www.hbrentals.com

Regional Offices

Corporate Headquarters

5813 Highway 90 East
 Broussard, LA 70518 USA
 Tel +1 337 839 1641
 Toll Free 800 262 6790

Americas Corporate Sales

11330 Clay Road
 Ste 200
 Houston, TX 77041 USA
 Tel +1 281 999 0047
 Tel +1 281 999 6505
 Toll Free 866 999 0040

Europe, Middle East Africa, Asia-Pacific

Howe Moss Drive
 Kirkhill Industrial Estate,
 Dyce, Aberdeen, AB21 OGL
 Tel +44 1224 772304
 Fax: +44 1224 772641

Offshore Operating & Service Facilities

Aberdeen, UK

Europe, Middle East, Africa, Asia-Pacific Support

Broussard, USA

Main Operating Facility

Trinidad and Tobago

Ciudad del Carmen, Mexico

Global Markets

Asia-Pacific
 Europe
 Middle East
 Mexico
 Trinidad and Tobago
 United States/
 Canada