


Subzero Sewer Systems



Best in Class Capacity

footprint

Link Multiple Accommodations Link multiple workforce

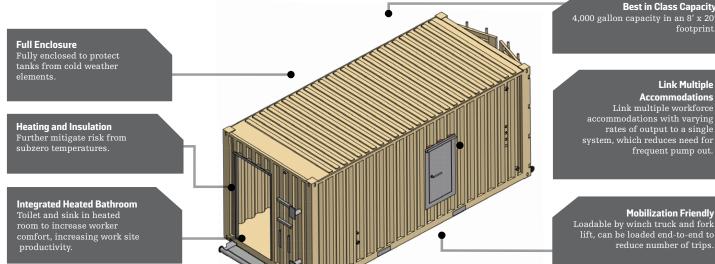

frequent pump out.

rates of output to a single

Mobilization Friendly Loadable by winch truck and fork reduce number of trips.

SUBZERO SEWAGE SYSTEM

Frozen sewage can bring a rig site to a grinding halt. Mitigate the effects of freezing temperatures with an HB Rentals Subzero Sewage System, designed to help optimize rig site operations and avoid delays brought about by extreme cold. The system is composed of a steel container, heating and insulating elements, two tanks, and pipework.

Fully Enclosed for Protection

- HB Subzero Sewage Systems are fully enclosed to protect the tanks from cold weather elements.
- Tanks are fully encapsulated in a durable and site friendly container - no need to be hidden from the crew or visitors to your site.
- Fully enclosed systems allow for cleaner and better organized site plans, decreasing safety risk that arises from cluttered rig sites.

Insulation and Heating for Enhanced Sub Zero Capabilities

• In addition to being fully enclosed, HB Rentals' tanks are also heated and insulated to further mitigate risk from subzero temperatures.

Industry Leading Capacity

- 4,000 gallon holding capacity puts HB Rentals' tanks at the top of their size class.
- Increased storage capacity equates to less pump outs resulting in cost savings.
- Increased storage capacity allows for fewer separate tanks per rig site.

Optimize Pump Out Services

• Link multiple accommodation units with different rates of output to a single tank via lift stations, creating an equalized distribution system.

Optimize Pump Out Services (cont.)

• Equalized distribution results in fewer pump outs, and thereby lower costs, by pumping out from a single shared tank.

Integrated Heated Bathroom for Worker Comfort

• Subzero Sewage Systems come with an integrated heated bathroom - toilet and sink. Increase work site productivity by increasing worker comfort in freezing conditions.

Dual Pump Design for Redundancy

• Two pump design means that pump failure will not stop operations. Simply switch over to the 2nd pump to continue rig site operations.

Indicators and Alarms to Prevent Problems

An integrated sewage overflow alarm warns you when your sewage fill rate reaches 75% capacity – to prevent overflow risk and environmental violations.


Plug In Optimized

• HB Rentals tanks are equipped with external power connections, allowing for easier and faster deployment.

Mobilization Friendly

- The HB Subzero Sewage System can be loaded by winch truck or forklift.
- Container design allows for the system to be loaded from end-to-end to reduce number of trips, decreasing mobilization costs.



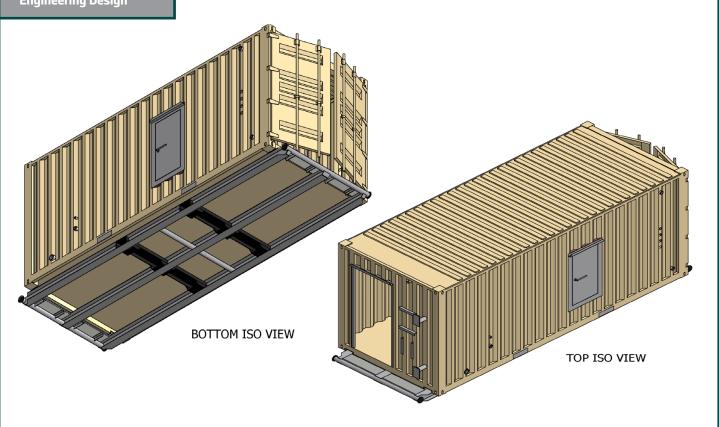

Subzero Sewage System Specifications

Dimensions: $8' W \ge 22' L \ge 9' H$ Weight: 8,500 LBS Approx

Regional Offices

Corporate Headquarters

5813 Highway 90 East Broussard, LA 70518 USA Tel +1 337 839 1641 Toll Free 800 262 6790

Americas **Corporate Sales**

11330 Clay Road Ste 200 Houston, TX 77041 USA Tel +1 281 999 0047 Fax +1 281 999 6505 Toll Free 866 999 0040

Europe, Middle East Africa, Asia-Pacific

Howe Moss Drive Kirkhill Industrial Estate, Dyce, Aberdeen, AB21 OGL Tel +44 1224 772304 Fax: +44 1224 772641

more info at www.hbrentals.com

US Land Market: Operating/Service Facilities

Colorado Fort Lupton Grand Junc<u>tion</u> **Pennsylvania** Canonsburg

Texas Midland

Global Markets

Louisiana Broussard

Oklahoma El Reno

Wyoming Casper Riverton

Asia-Pacific Europe Middle East Mexico Trinidad and Tobago United States/Canada